



YONGTAO

YONGTAO

CHINA CERAMIC & STONE PROCESSING MACHINES TOP-TEN ENTERPRISES

---

[www.chinayongtao.com](http://www.chinayongtao.com)



YONGTAO MACHINERY

# YSM 8 Head Multifunction Stone Edge Profile Polishing Machine



## Processing effect



## Parameter

No.	Name	Parameter
1	Nos. of profile head	3pc
2	Nos. of polish head	5pc
3	Diameter of wheel	Φ150-200mm*30mm
4	Motor power of profile head	5.5kw
5	Motor power of polish head	3kw
6	Method of polishing	automatic
7	Processing width	100-2800mm
8	Processing speed	0.5-3m/min
9	Max processing thickness	60mm
10	Total power	32.8kw
11	Water consumption	300L/min
12	Size of machine	7.5m*1.25m*2.3m
13	Weight	About 3800kg



## YSMD 5+3+3 Multifunction Stone Edge Profile Chamfer Polishing Machine



### Processing effect




### Parameter

No.	Name	Parameter
1	Nos. of profile head	2pc
2	Nos. of polish head	3pc
3	Diameter of wheel	Φ150mm*30mm
4	Motor power of profile head	5.5kw
5	Nos. of flat polish head	3pc *0.75kw
6	Nos. of chamfer polish head	3pc *0.75kw
7	Processing width	100-2800mm
8	Diameter of polishing wheel	125mm
9	Processing speed	0.5-3m/min
10	Max processing thickness	60mm
11	Total power	36.05kw
12	Air consumption	30L/min
13	Water consumption	300L/min
14	Size of machine	7.5m*1.25m*2.3m (with frame)
15	Weight	About 4500 kg

# YSMD 6+4 Multifunction Stone Edge Profile Chamfer Polishing Machine



## Processing effect

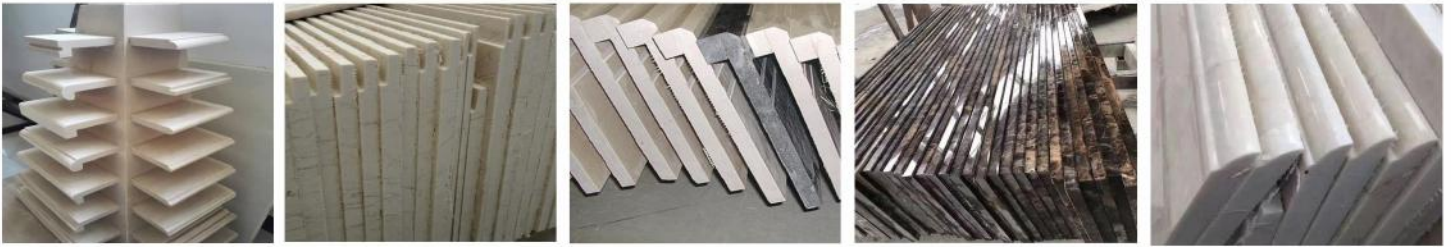

## Parameter


No.	Name	Parameter
1	Nos. of profile head	2pc
2	Motor power of profile head	5.5kw
3	Nos. of polish head	4pc
4	Motor power of polish head	3kw
5	Diameter of wheel	Φ150-200mm*30mm
6	Motor power of profile head	5.5kw
7	Nos. of chamfer head	1pc *3kw
8	Nos. of chamfer polish head	3pc *0.75kw
9	Processing width	100-2800mm
10	Diameter of polishing wheel	mm
11	Processing speed	0.5-3m/min
12	Max processing thickness	60mm
13	Total power	32kw
14	Size of machine	7.5m*1.25m*2.3m (with frame)
15	Weight	About 4200kg



# YSMD 11 Head Automatic Stone Flat Bevel Edge Polishing Machine



## Processing effect

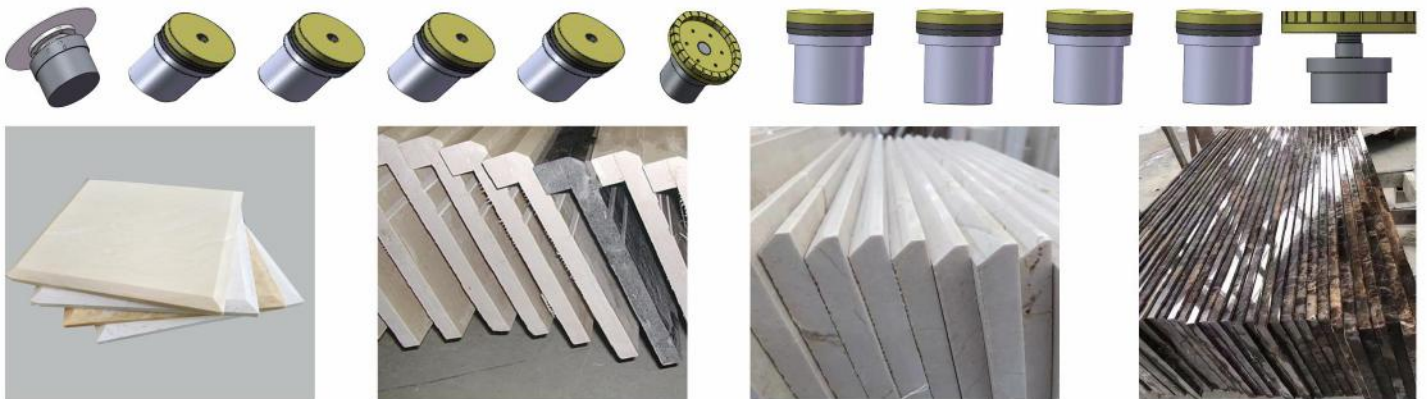

## Parameter


No.	Name	Parameter
1	Nos. of squaring head	1pc
2	Nos. of polishing head	4pc
3	Nos. of 45 degree chamfer head	1pc
4	Nos. of chamfer polish head	4pc
5	Diameter of polishing wheel	125mm
6	Processing width	100-2800mm
7	Max processing thickness	60mm
8	Processing speed	0.5-3m/min
9	Total power	18kw
10	Air consumption	30L/min
11	Water consumption	300L/min
12	Size of machine	7.5m*1.25m*2.3m (with frame)
13	Weight	About 3500kg

TEL : 0086-757-63297272 WEB: www.chinayongtao.com Email: sales@chinayongtao.com

# YCYP-2500 Quartz Countertop Edge Polishing Machine



## Processing effect

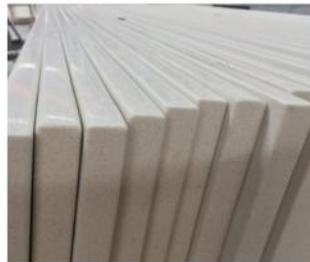

## Parameter




No.	Name	Parameter
1	Nos. of flat trimming head	1pc
2	Nos. of flat polish head	6pc
3	Nos. of calibrating head	1pc
4	Nos. of calibrating polishing head	2pc
5	Nos. of groove head	1pc
6	Nos. of R3 round polishing on top	2pc
7	Nos. of R3 round polishing on bottom	6pc
8	Processing width	600-2500mm
9	Processing speed	0.3-4m/min
10	Max processing thickness	60mm
11	Total power	32.7kw
12	Air consumption	50L/min
13	Water consumption	400L/min
14	Size of machine	6.5m*2.0m*1.9m
15	Weight	About 6800 kg



## YCYP-200 Countertop Backsplash Bullnose Bevel Edge Polishing Machine



### Processing effect

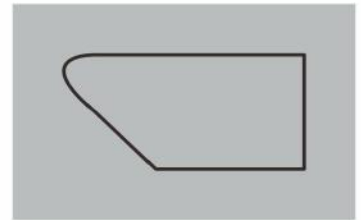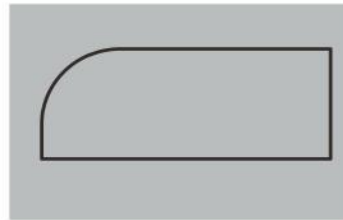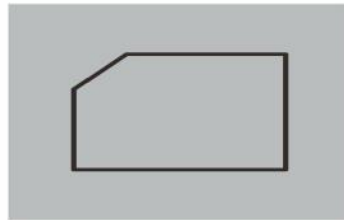

### Parameter


No.	Name	Parameter
1	Nos. of chamfer head (angle adjustable)	1pc
2	Nos. of round edge profile head	1pc
3	Nos. of bevel edge polishing head	4pc
4	Nos. of R3 round edge polish head	6pc
5	Processing width	40-150mm
6	Diameter of polishing wheel	125mm
7	Processing speed	0.3-3m/min
8	Max processing thickness	30mm
9	Total power	18.7kw
10	Air consumption	30L/min
11	Water consumption	300L/min
12	Size of machine	4.5m*1.5m*1.8m
13	Weight	About 3000 kg

TEL : 0086-757-63297272 WEB: www.chinayongtao.com Email: sales@chinayongtao.com

## YSMDP-800 1+6-1+2 Stone Edge Polishing Machine



### Processing effect

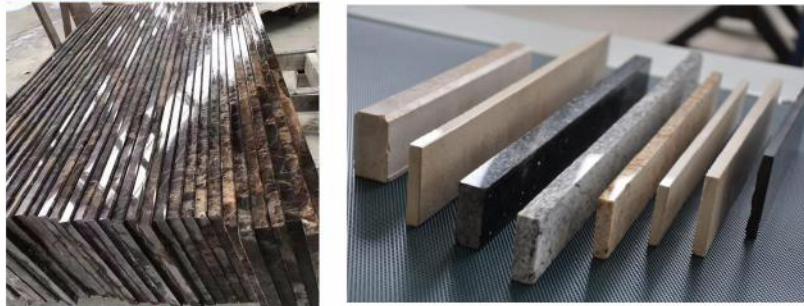

### Parameter

No.	Name	Parameter
1	Nos. of squaring head	1pc
2	Nos. of flat polishing head	6pcs
3	Nos. of chamfer head	1pc
4	Nos. of chamfer polishing head	2pcs
5	Processing width	70-800mm
6	Diameter of polishing wheel	125mm
7	Processing speed	0.5-3m/min
8	Max processing thickness	40mm
9	Total power	15kw
10	Air consumption	30L/min
11	Water consumption	300L/min
12	Size of machine	4.8m*1.8m*1.7m
13	Weight	About 3000 kg

TEL : 0086-757-63297272    WEB: [www.chinayongtao.com](http://www.chinayongtao.com)    Email: [sales@chinayongtao.com](mailto:sales@chinayongtao.com)



## YSMP-1200 8 Head Stone Edge Profiling Polishing Machine



### Processing effect



### Parameter

No.	Name	Parameter
1	Numbers of profile head	3pcs
2	Profile head motor	7.5kw
3	Diameter of profile wheel	150-200mm
4	Numbers of polish head	5pcs
5	Polish head motor	5.5kw
6	Diameter of polish head	150-200mm
7	Processing thickness	10-80mm
8	Processing width	80-1200mm
9	Processing speed	0.3-3.0m/min
10	Total power	57.35kw
11	Electric consumption	40kw/h
12	Water consumption	about 5000kg
13	Size of machine	5.20m×2.00m×1.80m
14	Weight	4500kg

TEL : 0086-757-63297272 WEB: www.chinayongtao.com Email: sales@chinayongtao.com

## YSXP-150 6 Head Automatic Stone Straight Profiling Polishing Machine



### Parameter


No.	Name	Parameter
1	Nos. of profile head	2pc
2	Nos. of polish head	4pc
3	Diameter of wheel	Φ150mm*30mm
4	Motor power of profile head	7.5kw
5	Motor power of polish head	5.5kw
6	Method of polishing	automatic
7	Processing width	30-150mm
8	Conveyor belt width	250mm
9	Processing speed	0.3-1.5m/min
10	Max processing thickness	60mm
11	Total power	40.32kw
12	Air consumption	30L/min
13	Water consumption	400L/min
14	Size of machine	3.48m*1.24m*1.85m
15	Weight	About 2800 kg



# YSXP-250 8 Head Automatic Stone Straight Profiling Polishing Machine



## Processing effect

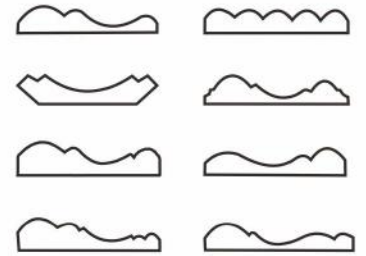

## Parameter

No.	Name	Parameter
1	Nos. of profile head	3pc
2	Nos. of polish head	5pc
3	Diameter of wheel	Φ180-200mm*30mm
4	Motor power of profile head	7.5kw
5	Motor power of polish head	5.5kw
6	Method of polishing	automatic
7	Workable width	30-400mm
8	Max profiling width	250mm
9	Processing speed	0.3-3.0m/min
10	Max processing thickness	80mm
11	Total power	58.63kw
12	Water consumption	500L/min
13	Size of machine	10.3m*2.0m*1.8m(with frame)
14	Weight	About 5000 kg

# YSU-1200 16 Head Stone Flat Polishing Machine



## Processing effect



## Parameter

No.	Name	Parameter
1	Conveyor belt	1220mm
2	Nos. of polishing head	16pc
3	Diameter of polishing pad	Φ150mm
4	Nos. of polishing motor	8pcs
5	Motor power of polishing head	4kw
6	Motor power of swing	1.1kw
7	Motor power of conveyor belt	3kw
8	Polishing speed	0.5-2.5m/min
9	Max polishing thickness	50mm
10	Max polishing width	1200mm
11	Total power	36.1kw
12	Air consumption	40L/min
13	Water consumption	350L/min
14	Dimension of machine	5.3m*2.25m*1.85m
15	Weight	About 4500 kg



# YJ-3020-5L 5 axis CNC Water Jet Cutting Machine



## Parameter


<b>Model</b>		YJ-2015-5L	YJ-3020-5L
<b>Structure</b>		Bridge	Bridge
<b>Cutting table size</b>		2100x1600mm	3100x2100mm
<b>Stroke</b>	<b>X-axis</b>	2000mm	3000mm
	<b>Y-axis</b>	1500mm	2000mm
	<b>Z-axis</b>	130mm	130mm
<b>CNC Controller</b>		AC Servo System	AC Servo System
<b>Accuracy</b>	<b>Cutting</b>	±0.1mm	±0.1mm
	<b>Repeat ability</b>	±0.05mm	±0.05mm
<b>Traverse speed</b>		6000/15000 mm/min	6000/15000 mm/min
<b>Power source</b>		380VAC, 50Hz, 3Phase	380VAC, 50Hz, 3Phase

TEL : 0086-757-63297272    WEB: www.chinayongtao.com    Email: sales@chinayongtao.com

# YTQZ-B/1 Single Spindle Mosaic Cutting Machine



Squaer



Lozenge



Rectangle



Hexagon

## Processing effect



## Parameter

No.	Name	400	600	800
1	Nos. Of cutting head	1pc	1pc	1pc
2	Width of conveyor belt	420mm	620mm	820mm
3	Dia. Of blade	Φ150-300mm*60mm	Φ150-300mm*60mm	Φ150-300mm*60mm
4	Main motor power	18.5/22kw	18.5/22kw	15/18.5/22/30kw
5	Conveyor motor	0.75kw	0.75kw	0.75kw
6	Speed of conveyor	0.8-4.0m/min	0.8-4.0m/min	0.8-4.0m/min
7	Lifter motor	0.75kw	0.75kw	0.75kw
8	Cutting width	20-400mm	20-600mm	20-800mm
9	Max. Cutting thickness	20mm	20mm	20mm
10	Size of machine	2.11*1.38*1.63m	2.11*1.58*1.63m	2.11*1.78*1.63m
11	Weight	About 1000kg	About 1200kg	About 1500kg
12	Water consumption	200L/min	300L/min	300L/min
13	Application	Mosaic	Mosaic, strips	Mosaic, strips
14	Materials	Stones	Tiles	Tiles



TEL :0086-757-63297272

WEB: www.chinayongtao.com


Email: sales@chinayongtao.com



# YTQZ-B/2 Two Spindle Ceramic Cutting Machine



## Processing effect

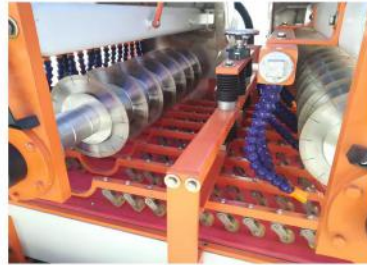

## Parameter

No.	Name	600	800
1	Nos. Of cutting head	2pc	2pc
2	Width of conveyor belt	620mm	820mm
3	Dia. Of blade	Φ150-300mm*60mm	Φ150-300mm*60mm
4	Main motor power	15kw	15kw
5	Conveyor motor	1.5kw	1.5kw
6	Speed of conveyor	0.8-4.0m/min	0.8-4.0m/min
7	Lifter motor	0.75kw	0.75kw
8	Cutting width	20-600mm	20-800mm
9	Max. Cutting thickness	20mm	20mm
10	Total power	33kw	33kw
11	Size of machine	2.5*1.58*1.63m	2.5*1.78*1.63m
12	Weight	About 1500kg	About 1800kg
13	Water consumption	400L/min	400L/min

TEL : 0086-757-63297272 WEB: www.chinayongtao.com Email: sales@chinayongtao.com

## YSR-1 4+4 Two Sides Stone Edge Polishing Machine



### Processing effect



### Parameter

No.	Name	Parameter		
1	Conveyor belt	55mm	7	Polishing thickness
2	Motor power of conveyor	1.5kw	8	Processing speed
3	Numbers of polishing head	8pcs (4+4)	9	Total power
4	Motor power of polishing wheel	2.2kw*4	10	Air consumption
5	Diameter of polishing wheel	125mm	11	Water consumption
6	Workable width	60-200mm	12	Size of machine
			13	Weight
				10-80mm
				0.1-5.0m/min
				40.32kw
				30L/min
				350L/min
				2.5m*1.5m*1.6m
				About 1200 kg

## YSU-200 6 Head Stone Flat Polishing Machine

### Parameter

No.	Name	Parameter
1	Nos. of wheel	6 pcs
2	Diameter of wheel	125mm
3	Conveyor belt	200mm
4	Polishing thickness	10-50mm
5	Processing speed	0.1-3.0m/min
6	Total power	5.6kw
7	Air consumption	30L/min
8	Water consumption	100L/min
9	Size of machine	2.8m*1.1m*1.96m
10	Weight	About 1500 kg



**Foshan Nanhai Yongtao Mechanical and Electrical Equipment Co.,Ltd**  
 Add:Wuzhuang Xiaofengtian Industrial Zone, Luocun, Nanhai District, Foshan,  
 Guangdong, China

TEL :0086-757-63297272 WEB:www.chinayongtao.com Email:sales@chinayongtao.com